

Assembly guide for Albany Gretton

For models 604, 705, 806

RECOMMENDED TOOLS: HAMMER, POZIDRIVE SCREWDRIVER (BATTERY OPERATED IS USEFUL), STANLEY KNIFE, PROTECTIVE GLOVES.

ESTIMATED ASSEMBLY TIME: TWO PEOPLE, 1-2 HOURS.

WE RECOMMEND PILOT DRILLING SCREW HOLES FIRST

PARTS LIST	E: nail & screw pack
A: 1 x floor	F: Felt (604 = 4.0m roll, 705 = 4.6m, 806 = 5.2m + small)
B: 1 x back	
C: 2 x ends	G: 1 x purlin
D: 1 x roof	H: Trim pack

1. Treat the underside of the floor if the building has been supplied untreated. Lay the floor panel (A) in its desired position (remember to leave enough space around the building for roof overhang and maintenance). It is essential the floor is on a solid, level base, otherwise the building will not fit together properly and the door may not fit flush. Place the panels around the floor - it will help you understand how they fit together.

2. Position the back section (B) on the back edge of the floor (the lip on the bottom overhangs the floor). While your assistant holds the back, place an end panel (C) on the floor to form a corner. Making sure the panels are sitting flat on the floor and are butted together, screw through the end section into the back from the inside using two of the screws provided.

3. Select the second end (C) and place it on the floor opposite the other one. Screw to the back panel as before with two screws, again making sure the sections are flat on the floor.

4. Place the roof section (D) on top of the other panels, with the overhang evenly distributed. Offer the purlin up to the bottom of the roof framing at the front so it is helping to support the roof, then screw in to the end panels (C) at both ends. Before the next step, check that the roof is square and sitting flat on the sides - if not it is possible the floor is not level and will need packing in one corner.

5. With the roof square, check that the three walls are sitting flat on the floor. Screw the panels to the floor using two screws per panel, ensuring that you screw into a floor joist (follow the lines of nails in the floor to locate the joists).

6. Fix the roof panel into the top of the side panels using the 40mm nails.

7. Felt the roof using the small clout nails provided. Start by carefully removing the paper from the large roll of felt, then roll it out on a flat, dry surface. Fold it in half and cut along the middle to create two equal strips. See felt plan overleaf as reference for next part. Place the first strip on the low side of the roof so it overhangs evenly at each end and approximately 50mm over the long side, secure with three evenly spaced nails along the upper edge (you will cover this over later with Strip 2) then fold the 50mm overhang over the side of the roof (trying to crease it and keep it taut) and nail every 100 - 150 mm along the edge of the roof framing, working from the middle outwards. For models 604 & 705, repeat with Strip 2 on the high side - Strip 2 should comfortably overlap Strip 1 in the middle. Now secure both strips by nailing near the bottom of Strip 2 every 100 - 150mm from the middle.

For model 806, position Strip 2 on the roof so it overlaps Strip 1 by 100 - 150mm, hold in place with three nails at the top, then nail along the bottom of the strip (through Strip 1) every 100 - 150mm from the middle. Place the small strip so it overhangs the high side of the roof by 50mm - it should comfortably overlap Strip 2. Nail along the bottom of the Small Strip (also through Strip 2) as previously. Next crease the small strip over the edge and keep it taut while nailing every 100 - 150mm from the middle. Fold over the loose ends of the felt and nail down in a few places.

8. Open the trim pack. Nail the two shorter fascia boards (H) to the to the ends of the roof and the long one at the front. Trim the felt if necessary. Nail the two corner strips (H) in the gaps where the end panels meet the back panel.

If your building has been supplied untreated, it requires treating straight away.


We recommend you re-treat your building within 6 months and from then on annually.

Albany Brown treatment can be ordered from your local retailer in 5 litre tubs.

These instructions are meant as a guide only. We reserve the right to alter design without prior notice.

Thanks for buying an Albany shed. www.albanysheds.co.uk

Felt Plan 604 / 705

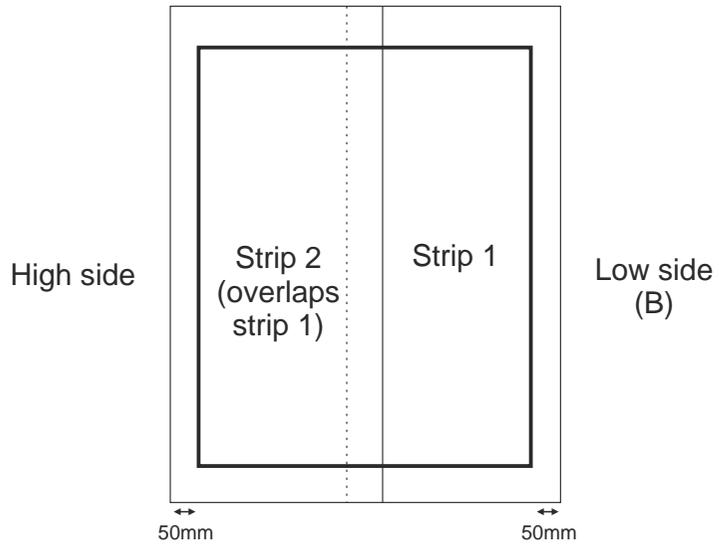

Felt Plan 806

